


Concentric Reducer - No. 140S

Nominal Size	Part Number	Max. Working Pressure psi / kpa	E to E in./mm	Approx. Wt. Ea. lb./ kg
1 1/2"x1"	140S150100	300 2070	2.50 63.5	0.9 0.4
1 1/2"x1 1/4"	140S150100	300 2070	2.50 63.5	1.2 0.5
2"x1"	140S150100	300 2070	2.50 63.5	0.8 0.4
2"x1 1/4"	140S150100	300 2070	2.50 63.5	1.4 0.6
2"x1 1/2"	140S150100	300 2070	2.50 63.5	1.2 0.5
2 1/2"x1"	140S150100	300 2070	2.50 63.5	4.2 1.9
2 1/2"x1 1/4"	140S150100	300 2070	2.50 63.5	3.9 1.8
2 1/2"x1 1/2"	140S150100	300 2070	2.50 63.5	4.2 1.9
2 1/2"x2"	140S150100	300 2070	2.50 63.5	4.6 2.1
3"ODx1"	140S150100	300 2070	2.50 63.5	2.9 1.3
3"ODx1 1/4"	140S150100	300 2070	2.50 63.5	3.5 1.6
3"ODx1 1/2"	140S150100	300 2070	2.50 63.5	3.5 1.6
3"ODx2"	140S150100	300 2070	2.50 63.5	1.9 0.9
3"x1"	140S150100	300 2070	2.50 63.5	1.5 0.7
3"x1 1/4"	140S150100	300 2070	2.50 63.5	3.5 1.6
3"x1 1/2"	140S150100	300 2070	2.50 63.5	6.0 2.7
3"x2"	140S150100	300 2070	2.50 63.5	1.9 0.9
3"x2 1/2"	140S150100	300 2070	2.50 63.5	2.2 1.0

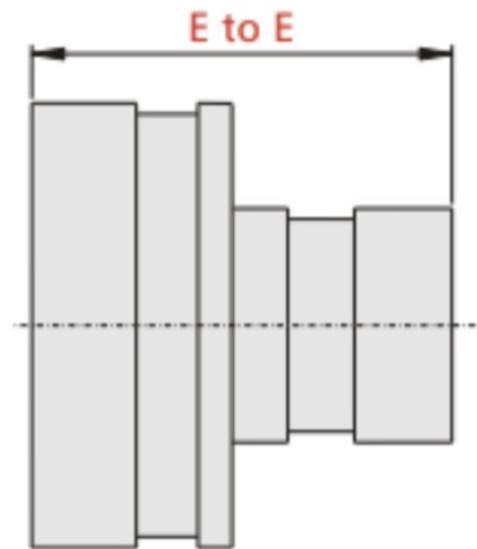

STYLE 140S

Concentric Reducer - No. 140S

Nominal Size	Part Number	Max. Working Pressure psi / kpa	E to E in./mm	Approx. Wt. Ea. lb./ kg
4"x2"	140S400200	300 2070	3.00 76.2	2.8 1.3
4"x2 1/2"	140S400250	300 2070	3.00 76.2	3.2 1.4
4"x3"	140S400300	300 2070	3.00 76.2	3.7 1.7
6"x2"	140S600200	300 2070	4.00 101.6	7.7 3.5
6"x2 1/2"	140S600250	300 2070	4.00 101.6	7.5 3.4
6"x3"	140S600300	300 2070	4.00 101.6	7.5 3.4
6"x4"	140S600400	300 2070	4.00 101.6	7.6 3.4